



Doing Our Best to Provide You the Best


TB26232, Rev 0
03/18

AIR PRESSURE STOPLIGHT SWITCH KIT

Kit #6232

The supplemental air pressure stoplight switch kit allows for coach notification in an application where the towed vehicle does not have a functional brake light switch in the tow position.

1. Insert the 1/4" push lock tee into the output air line (from red bulkhead to cylinder).
2. Connect unused port of tee to the stoplight switch with a length of air line.
3. Connect the orange wire that goes between the breakaway switch and fuse holder (12v+).
4. Connect the black wire to the gray coach notification wire.

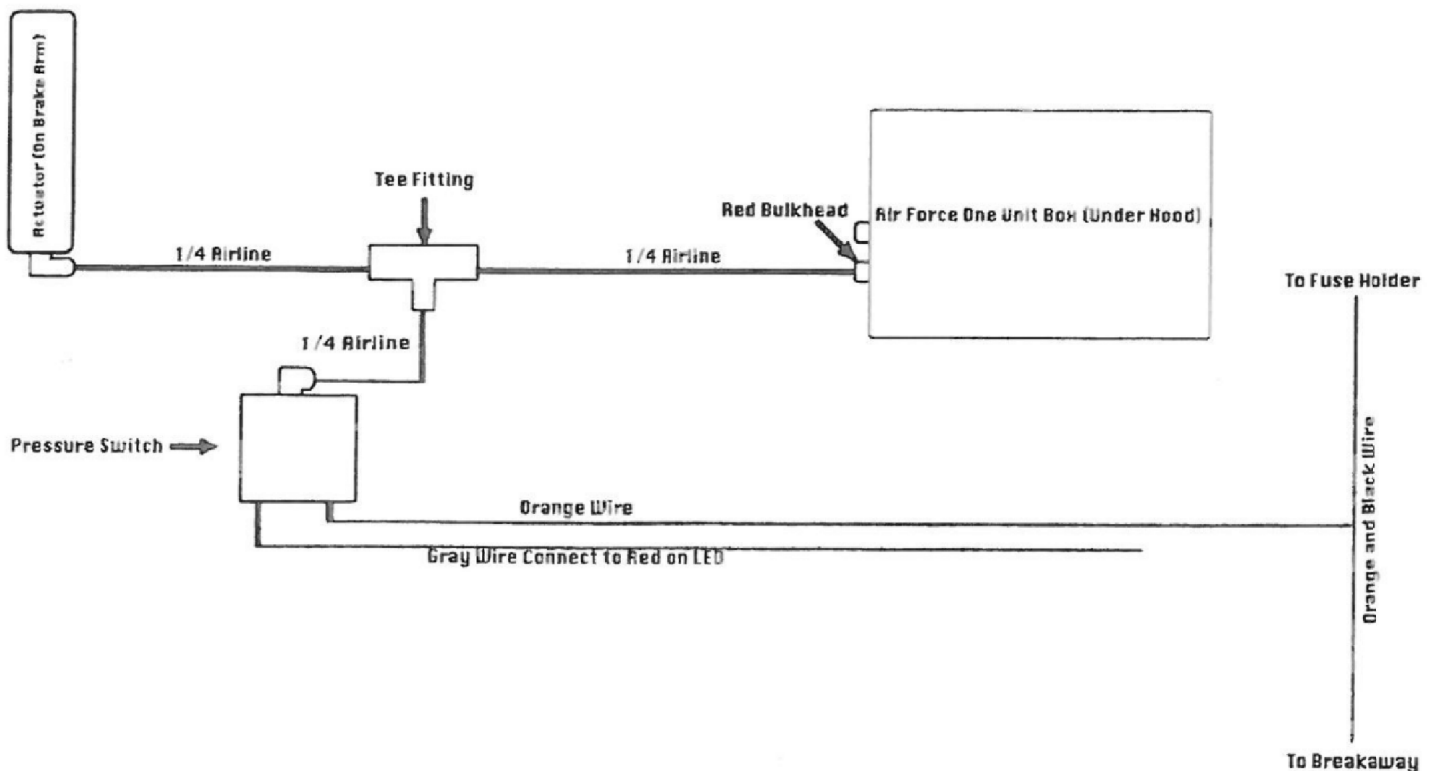

4010 320th Street • Boyden, IA 51234
www.demco-products.com • 800.543.3626