

DEMCO


GRAIN TRAILERS



The Best Ground Clearance in the Industry
Demco hopper bottom grain trailers



Doing Our Best to Provide You the Best
www.demco-products.com • 1.800.543.3626




—●— **STANDARD FEATURES**

—●— **OPTIONS**

Steel Grain Trailers

Standard Features

- 3-leaf heavy duty SAF Holland spring suspensions
- 22.5K Arvin Meritor axles with Wabco ABS brakes (single axle) and 10 bolt hub piloted rims
- Holland Atlas 55 2-speed drop leg landing gear (24' 28' & 30' trailers)
- Holland Atlas 55 2-speed landing gear (34' - 42' trailers)
- Full center dividers on trailers 30' and up
- Rubber mounted LED lighting & sealed wiring system, 7 way receptacle by Trucklight
- Color coded brake lines
- Aluminum ladders (front & rear)
- Ladder rungs on inside of trailer
- Hopper sight windows
- Shur-Co manual roll tarp (Black, White, Red, Blue)
- Easy off tarp stops
- Roll tube deflectors
- Anti-sail Mudflaps
- D.O.T. approved conspicuity tape

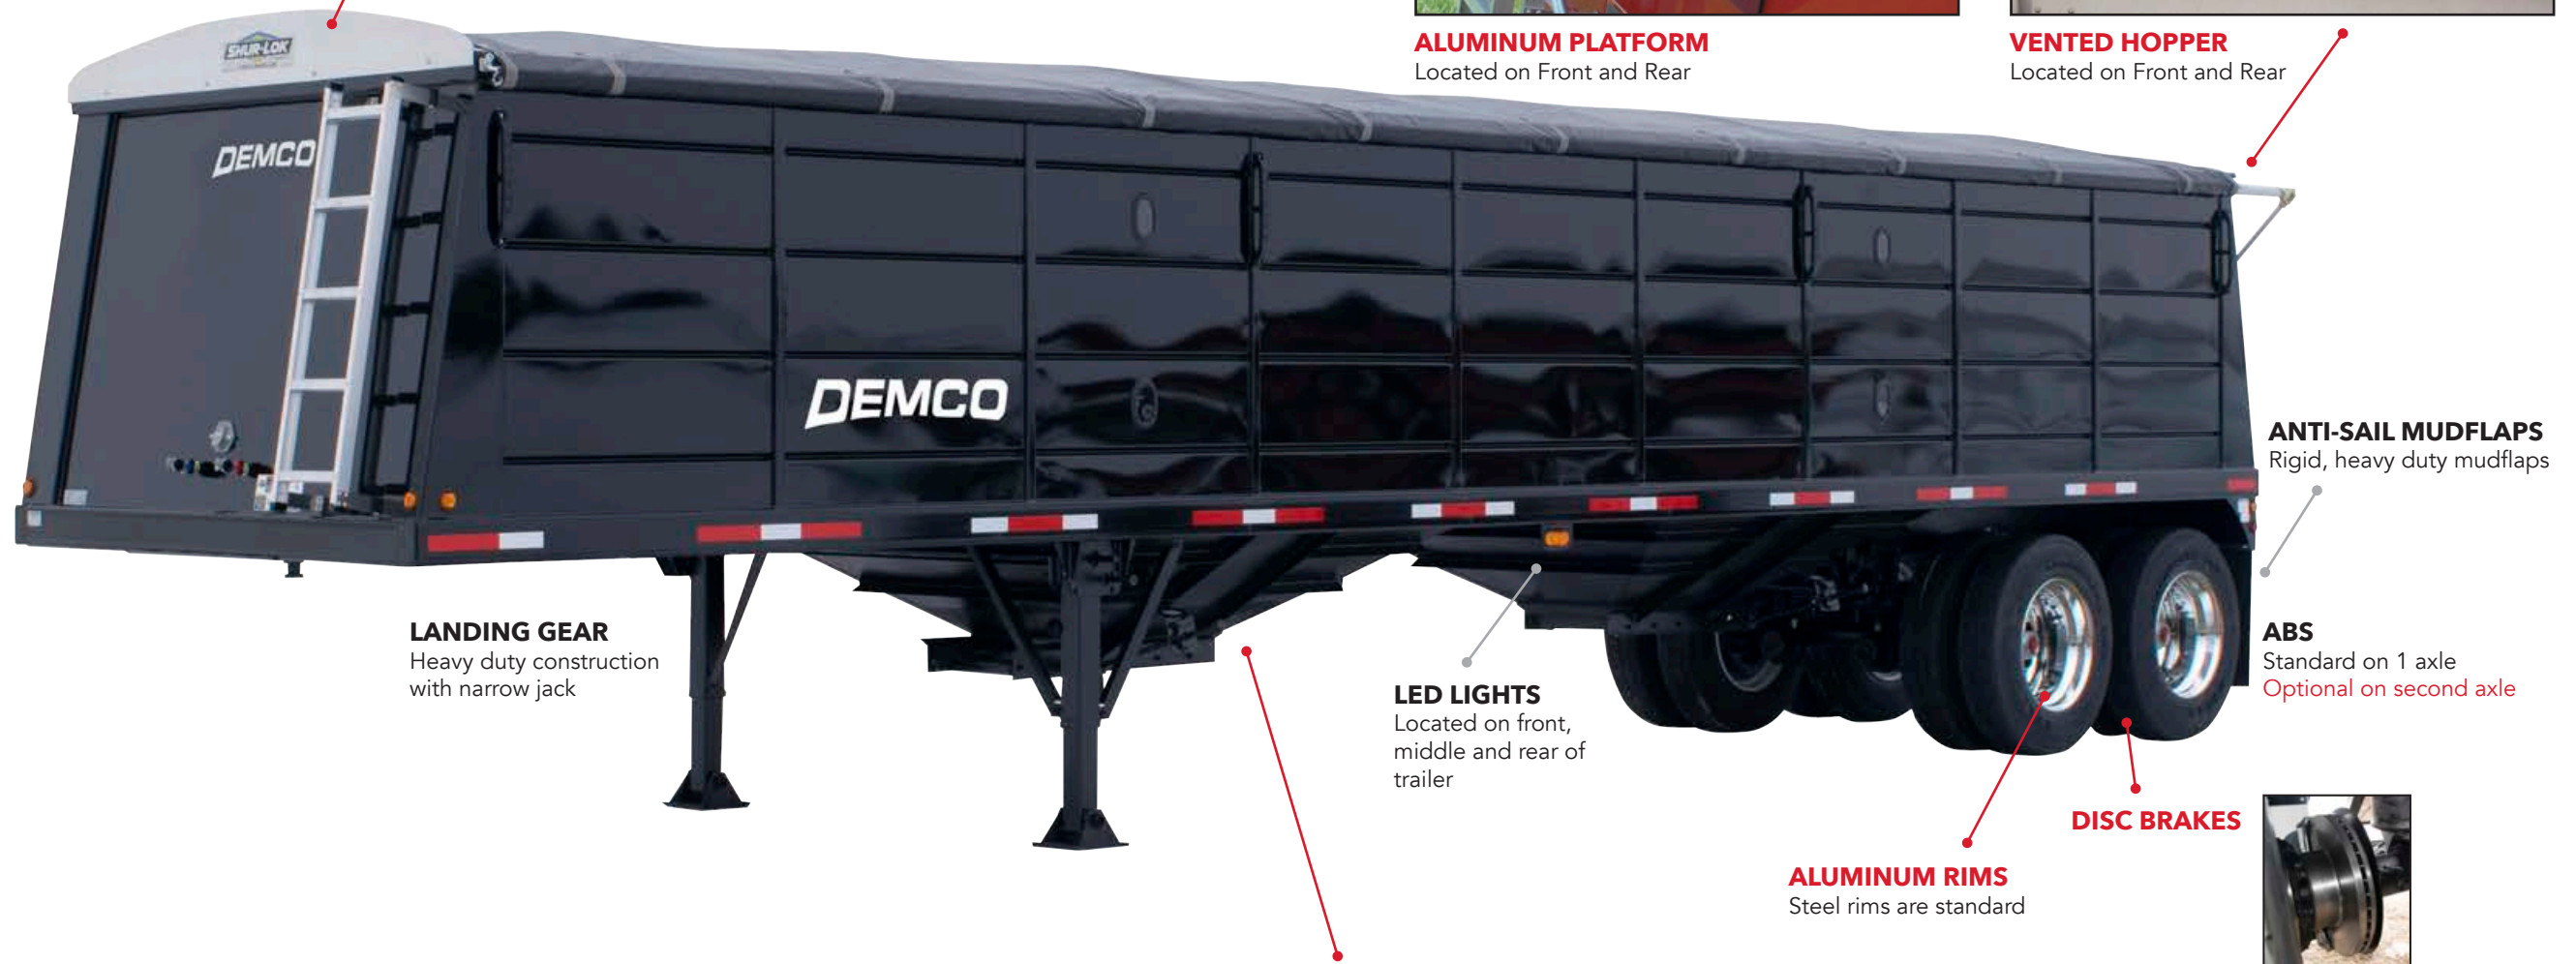

TARP CABLE RETURN
Located on Front and Rear



LADDER RUNGS
Located on Inside of Trailer



STAINLESS STEEL CORNERS



ALUMINUM PLATFORM
Located on Front and Rear



VENTED HOPPER
Located on Front and Rear

LANDING GEAR
Heavy duty construction with narrow jack

LED LIGHTS
Located on front, middle and rear of trailer

ANTI-SAIL MUDFLAPS
Rigid, heavy duty mudflaps

ABS
Standard on 1 axle
Optional on second axle

DISC BRAKES


ALUMINUM RIMS
Steel rims are standard



DOUBLE RIDGE STRAP



DUMP VALVE
with Scale

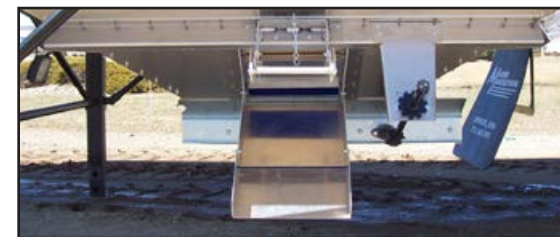

SIDE CHUTE
for Swing Auger Applications



PINTLE HOOK
Spring and Air Ride



Demco Grain Trailer Specifications

| | 24' | 28' | 30' | 34' | 36' | 38' | 40' | 42' |
|-----------------------------------|-------|-------|-------|--------|--------|--------|--------|--------|
| Height - ground to top rail | 9'6" | 9'6" | 9'6" | 9'6" | 9'6" | 9'6" | 9'6" | 9'6" |
| Number of hoppers | 1 | 1 | 2 | 2 | 2 | 2 | 2 | 2 |
| Hopper clearance empty (approx.) | 25" | 25" | 25" | 25" | 25" | 25" | 25" | 25" |
| New 22,500# axles | 1 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Cubic feet | 810 | 855 | 1013 | 1152 | 1191 | 1255 | 1290 | 1324 |
| Leveled bushels (approx.) | 695 | 715 | 815 | 922 | 953 | 1010 | 1035 | 1060 |
| Heaped bushels (approx.) | 740 | 765 | 870 | 985 | 1020 | 1100 | 1120 | 1135 |
| King pin to landing leg clearance | 83" | 87" | 99" | 80" | 98" | 107" | 95" | 90" |
| Kin pin setting | 15" | 15" | 15" | 18" | 24" | 15" | 18" | 24" |
| Hopper slope | 35 | 35 | 35 | 35 | 35 | 35 | 35 | 35 |
| Floor slope | 28 | 28 | 28 | 35 | 35 | 35 | 31 | 35 |
| Weight spring ride | 6,600 | 9,000 | 9,800 | 10,200 | 10,400 | 10,700 | 11,000 | 11,200 |

(Information based on 66" wall height and 24.5 tires; air ride configurations add 240 lbs to the trailer)

Steel Grain Trailer Options

- Air Ride Suspension
- Manual Dump with Scale
- ABS Installed on Second Axle
- Side Discharge Chute
- Aluminum Platforms (front & rear)
- Pintle Hook
- Front Mudflaps
- Vented Hopper
- Double Ridge Strap
- Electric Hopper Openers
- Electric Roll Tarp with Remote
- Hopper Work Lights
- 2-Speed Gear Reducer on Hopper Door
- Aluminum Wheels
- Stainless Steel Corners
- Custom Trailer Color and Custom Tarp Color
- Tarp Cable Return (front & rear)
- Tarp Saver Cords

The information contained herein is general in nature and is not intended for specific application purposes. Demco Manufacturing reserves the right to make changes in specifications or products at any time without notice or obligation. Trailers pictured in this brochure may feature optional equipment.

DEMCO

Doing Our Best to Provide You the Best

4010 320th Street • Boyden, Iowa 51234

1.800.543.3626

www.demco-products.com