

DEMCO

GONDOLA

TRAILERS



Unbeatable Hauling Power, On the Road or Off

www.demco-products.com • 1.800.543.3626

TARP READY BRACKETS



- MANIFEST HOLDER
- GLAD HANDS, WIRING SOCKET
- SECURITY STRAP & TARP READY BRACKET

HINGES
New mounting of hinges to better align the rear door

LADDER
Rear ladder moved from driver side rear side panel to driver side tailgate

ANTI-SAIL MUDFLAPS
Rigid, heavy duty mudflaps



LATCH



SAFETY DOOR OPENER
Hook on here to open door free and clear from falling scrap



AXLE CONFIGURATIONS

See back page for Suspension details and options



Closed Tandem



Spread



Tri



LANDING GEAR
Heavy duty construction with narrow jack

LED LIGHTS
Located on front, middle and rear of trailer

ABS
Standard on 1 axle
Optional on second axle

ALUMINUM RIMS
Steel rims are standard

OPTIONS



VENTED TAIL GATE
Optional vented tail gate




ALUMINUM TOOLBOX
Aluminum, enclosed toolbox - up to 2 on passenger side and 2 on driver side




SPARE TIRE CARRIER



ROLL-RITE TARP

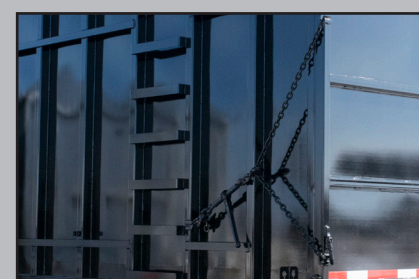

CHAIN LOAD BINDER

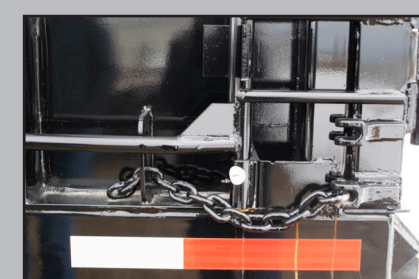

SAFETY DOOR OPENER
The safety door opener is optional for the Latch closure



SCALE
Haldex Scale-O-Matic

Axles & Suspensions

- 22.5K tandem axles with 1 axle ABS brake
- 3 Leaf heavy duty suspension, closed tandem

OPTIONAL:

- Suspensions:
Spring ride - 10'1" spread
Air ride - closed tandem
Air ride - 10'1" spread

Standard Features

- Sealed wiring system-designed for Demco by Trucklite
- Color coded brake lines
- 2-speed landing gear
- Phosphate washed for superior paint adhesion
- All exterior mating surfaces are caulked prior to paint
- Diamond Vogel polyurethane primer and paint
- D.O.T. approved conspicuity tape and rubber mounted lights

Options

- ABS installed on second axle
- Chaim load binder
- Manual dump valve - air ride
- Scale - air ride
- Spare tire carrier
- Aluminum rims

TRAILER WITH HARDOX® WEAR PLATE

Wall Material 1/8" HARDOX® 450
Floor Material 4 mm HARDOX® 500 Tuf

Side Wall Height	4' wall	5' wall	6' wall	7' wall	8' wall
------------------	---------	---------	---------	---------	---------

40' Trailer Length - Closed Tandem Spring Ride:

Cubic Yards Capacity	45	n/a	n/a		90
Tare Weight in Pounds	15,460	n/a	n/a		19,140

44' Trailer Length - Closed Tandem Spring Ride:

Cubic Yards Capacity	53	66	78		104
Tare Weight in Pounds	15,500	16,250	16,700		18,800

48' Trailer Length - Closed Tandem Spring Ride:

Cubic Yards Capacity	57	71	85		113
Tare Weight in Pounds	16,400	17,300	18,100		20,000

53' Trailer Length:

Cubic Yards Capacity				110	125
Tare Weight in Pounds:					
Closed Tandem Spring Ride				20,500	21,400
Axle Forward				20,800	
Triple Axle Air Ride					24,200

Trailer Height:

All Lengths	8'8"	9'8"	10'8"	11'8"	12'8"
-------------	------	------	-------	-------	-------

SPECIFICATIONS

Gross Vehicle Weight Rating (GVWR)	68,000 lbs.
Brake Size	16.5" x 7"
Bumper Height	22"
Cross Members	S5 10 I-beam on 18" centers
Wall Posts	3" x 3" formed "C" Channel Grd 80 on 36" centers
Bottom Wall Rail Structural Tube	3" x 6" x 1/4"
Top Wall Rail Structural Tube	3" x 3" 7 ga.
Kingpin	Height 49", Setting: 24" std., 36" available Landing leg clearance of 98" with 24" kingpin setting



DEMCO

Doing Our Best to Provide You the Best

4010 320th Street • Boyden, Iowa 51234

1.800.543.3626

www.demco-products.com