

DEMCO

DROP DECK TRAILERS



Doing Our Best to Provide You the Best
www.demco-products.com • 1.800.543.3626



STANDARD FEATURES


OPTIONS



WINCH TRACK
Track is standard on the driver's side (optional on passenger's side), sliding winches optional



FRONT BULKHEAD
Removable

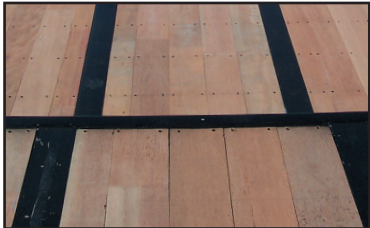

1 1/8" APITONG FLOORING
screwed to every cross member



STEEL FLOORING
48' & 53' no beavertail



NEW
DISC BRAKES

NEW

SPRING ASSIST RAMPS

NOW EASIER TO MOVE

Scan this QR Code to see how easy the ramps are to move up and down



HOLLAND ATLAS 55 LANDING GEAR
55,000 lb capacity



TOOLBOX
Located between wheels or up front



DOUBLE HINGE RAMP
with built in stabilizer



RAMP DESIGNED TO CARRY EXTRA CARGO
Groove fits 2x4 board



BEAVER TAIL WITH 3 RAMPS



4 SPRINGS PER RAMP
2 springs assist in raising and 2 springs assist in lowering

TIRE PACKAGE OPTIONS

- 255/70R22.5 Import Radial LRH
- 255/70R22.5 Domestic Radial LRH Dunnlap SP160

Demco Manufacturing leads the steel drop deck trailer industry by providing quality workmanship into each trailer. The attention to detail in both design and construction is unrivaled.

- OTHER TRAILER OPTIONS
- Holland SAF Air Ride Suspension
 - Manual Dump Valve
 - Electric Dump Valve
 - Scale for Manual or Electric Dump Valve
 - 25K Tandem Axles with 8.62" Brakes (I.L.O. 7" Brakes)



3 AXLE CONFIGURATIONS: TANDEM, SPLIT TANDEM, TRIPLE

Air ride suspension is standard on triple axle trailers

STANDARD DESIGN AND PERFORMANCE CHARACTERISTICS

- Main Beams Designed with Camber
- Web - 1/4" Grade 100 High Yield Steel
- Flange - 3/8" x 5" Grade 100 High Yield Steel
- Cross Members - 4" x 3.2# 80,000 Yield Jr. I-Beam on 16" Centers
- Side Rails - 6" x 8.2# Structural C Channel
- Stake Pockets & Pipe Spooling at 9" Intervals
- Rub Rail - 2" x 3/8" Flat Steel
- Upper Deck Length of 11 Feet
- Upper Deck Length of 11 Feet
- Transition drop of 19.5" from Upper Deck to Lower Deck
- 102" Overall Trailer Width
- 40 3/4" Lower Deck Ride Height
- Beam Rating Lower Deck - 50K lbs Per 10 Linear Feet
- 68K Gross Vehicle Weight Rating on closed Tandem & Spread Axle Trailers
- 77.5 Gross Vehicle Weight Rating on Triple Axle Trailers

STEEL DROP DECK TRAILER MODELS

Trailer Model	Trailer Description	Closed Suspension	10:1 Spread Suspension	Triple Axle Suspension
DD40	40' Tandem Axle	✓	n/a	n/a
DD45	45' Tandem Axle	✓	✓	n/a
DD48	48' Tandem Axle	✓	✓	n/a
DD53	53' Tandem Axle	✓	✓	n/a
DD40-5	40' Tandem Axle + 5' Beaver Tail with Twin Ramps	✓	n/a	n/a
DD43-5	43' Tandem Axle + 5' Beaver Tail with Twin Ramps	✓	✓	n/a
DD45-5	45' Tandem Axle + 5' Beaver Tail with Twin Ramps	✓	✓	n/a
DD48-5	48' Tandem Axle + 5' Beaver Tail with Twin Ramps	✓	✓	n/a
DD48-3	48' Triple Axle	n/a	n/a	✓
DD53-3	53' Triple Axle	n/a	n/a	✓
DD48-5-3	48' Triple Axle + 5' Beaver Tail with Twin Ramps	n/a	n/a	✓

The information contained herein is general in nature and is not intended for specific application purposes. Demco Manufacturing reserves the right to make changes in specifications or products at any time without notice or obligation. Trailers pictured in this brochure may feature optional equipment.



Doing Our Best to Provide You the Best

4010 320th Street • Boyden, Iowa 51234

1.800.543.3626

www.demco-products.com