




Doing Our Best to Provide You the Best

8D000005, Rev AB
03/24

LIQUID TENDER TRAILERS

5D000366 - LIQUID TENDER TIE DOWN U-BOLT KIT

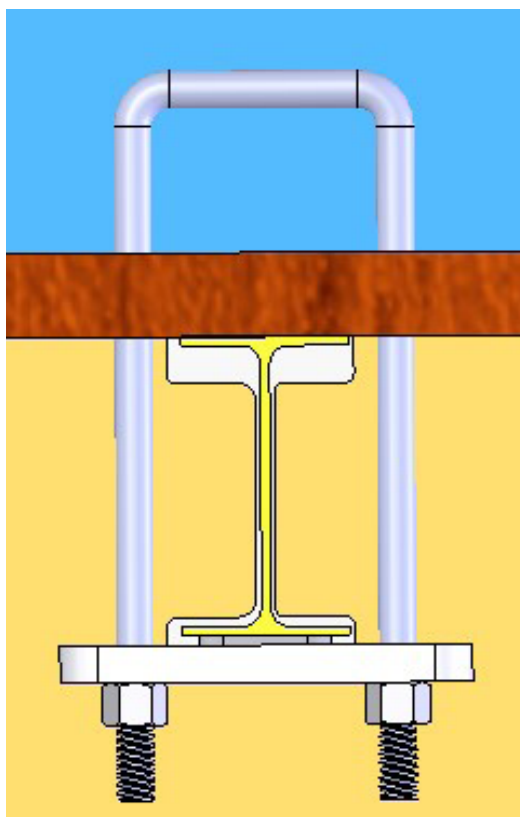

INSTRUCTION MANUAL


SAFETY:

One of these U-Bolt assemblies, if installed correctly, is rated for a Work Load Limit (WLL) of 5,000 LBS.

The purpose of the kit is to allow for additional tie down points in the center of the work deck. Being able to secure a tote or equipment by strapping it down from the side rail to these U-bolts in the center of the deck allows for more work space and prevents tripping hazards.

5D000366 - LIQUID TENDER TIE DOWN U-BOLT KIT

BOM ID	Qty	Item No	Description
1	2	1AFC18H0000	1/2"-13 NYLON LOCKING NUT GR 2 ZINC
2	1	1AFZ51HCA00	1/2"-13 X 3 X 9-1/4 SQUARE BEND U-BOLT
3	1	3D000711	HOLD DOWN PLATE
4	1	8D000005	TIE DOWN U-BOLT INSTRUCTION MANUAL

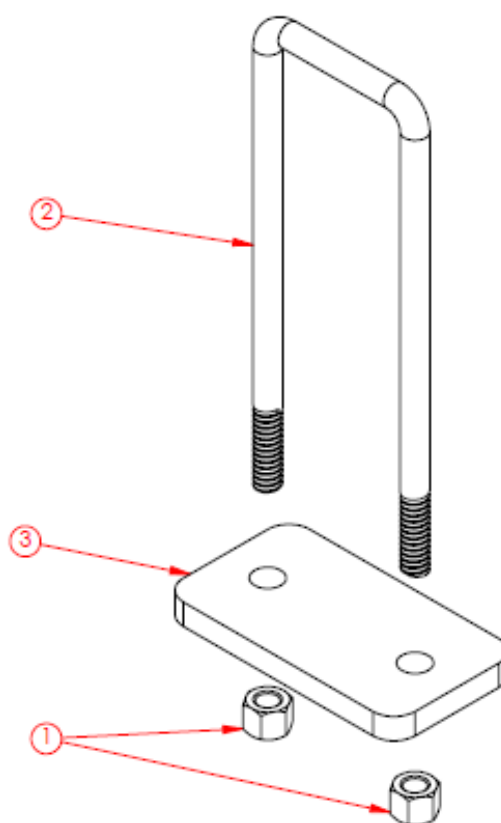**WARNING:**

Failure to install tie down kits around I-Beam cross members could create a hazardous situation!

INSTALLATION INSTRUCTIONS:

1. Locate the center of the I-beam cross member.
2. Measure 1-3/4" to each side of the cross member center line and drill a 5/8" diameter hole on each side.
3. Drop U-bolt down thru the holes.
4. Install hold down plate and (2) 1/2" nylon locking nuts.



4010 320th St., Boyden, IA. 51234

Phone: (712) 725-2311

Fax: (712) 725-2380

Toll Free: 1-800-54DEMCO (1-800-543-3626)

**Demco warranty policies, operator manuals, and product registration
can be found online:**

www.demco-products.com