
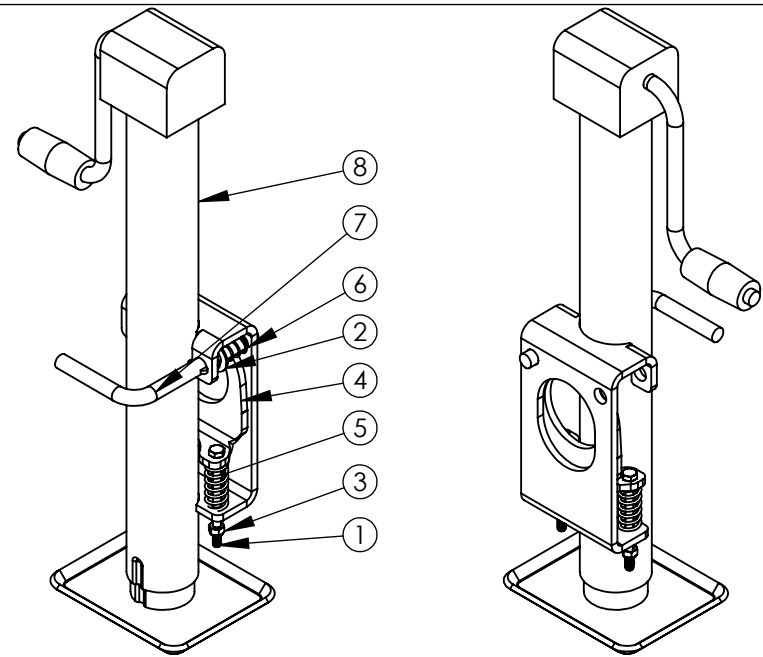


Ⓐ NOTE: USE ROUND NUT AND
PLUG WELD TO INSIDE JACK TUBE

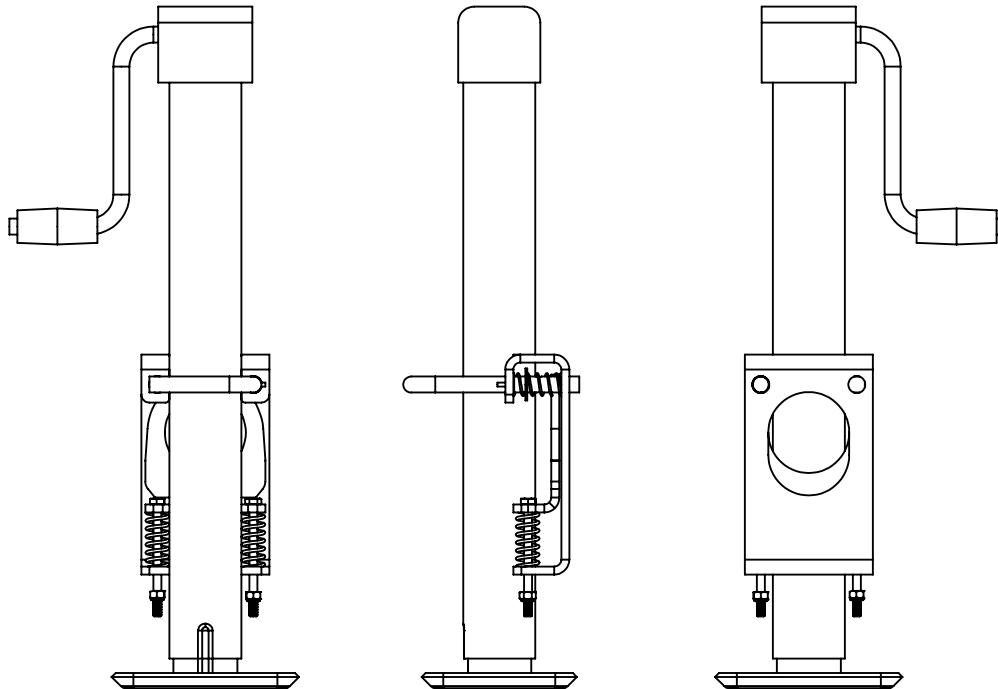

*INCLUDE 3 NYLON SPACER WASHERS #13001
*ALL COMPONENTS 500HR. SALT SPRAY
*ALL SPRINGS STAINLESS STEEL
*ALL BOLTS NUTS AND WASHERS STAINLESS STEEL

ITEM	PART #	DESCRIPTION	QTY
1	01089	BOLT .25NC X 3.50 GR5 HEX	2
2	02384	.50 X 14GA MACHINE WASHER	1
3	02772	NUT, .25NC LOCK NYLON INSERT	2
4	12996-95	SPRING BRACKET	1
5	12998	UPPER SPRING	2
6	12999	HANDEL SPRING	1
7	13003-95	½" O.D. LOCK PIN	1
8	13005-30	SIDE WIND JACK W/FOOT	1
9	13007	DOUBLE LOOP BRIDGE PIN	1

Demco
4010 320TH ST. PO BOX 189
BOYDEN, IOWA 51234

THIRD ANGLE
PROJECTION

UNLESS OTHERWISE
SPECIFIED ALL DIMENSIONS
ARE IN INCHES

THE DRAWING AND ALL
INFORMATION THERE
ON ARE THE PROPERTY OF
DEMCO

WEIGHT 31.91
VOLUME 113.24

DRAWN BY BVDP

APPROV. BY TL

SAVED BY JCN

DATE 02/26/09

DATE 05/04/17

DATE 06/22/17

TOLERANCES

.X = ±.060
.XX = ±.030
.XXX = ±.010
MIN. MACHINE SURFACE 250
BREAK ALL SHARP EDGES
BEND AND DRAFT $\angle \pm 1^\circ$

DESCRIPTION
JACK ASSEMBLY

DRAWING. NO.

13433

REV

—

SCALE: 1:6

SHEET 1 OF 1

REV.	DESCRIPTION	DATE	APPROVED
A	ADD NOTE FOR WELD	5/4/2017	TL