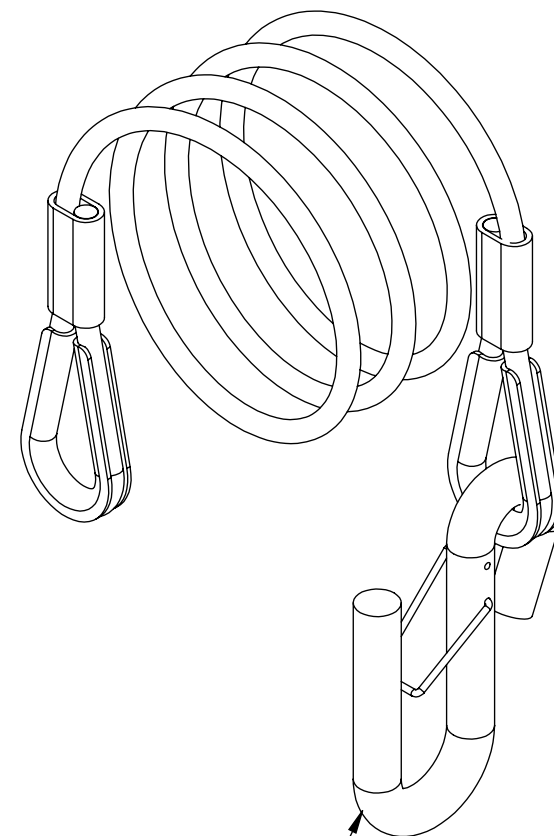
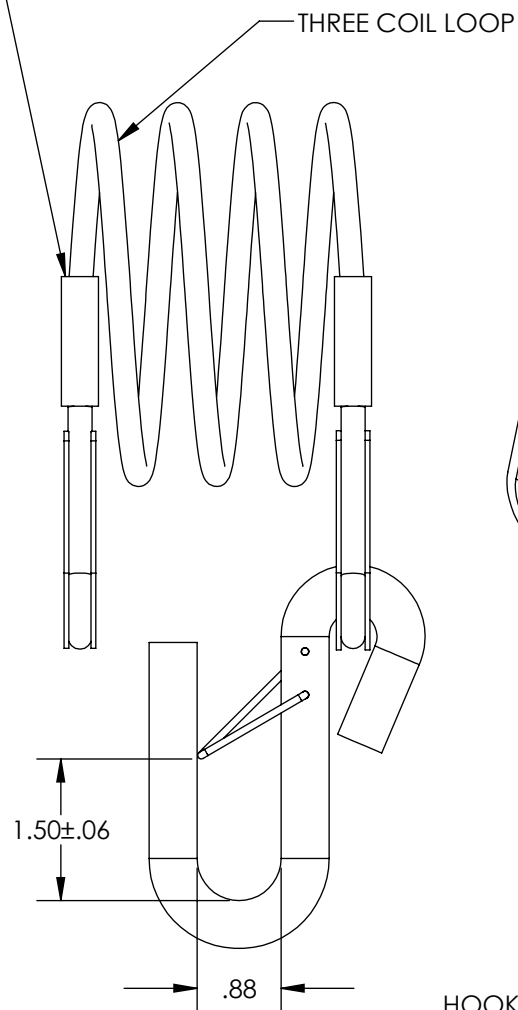
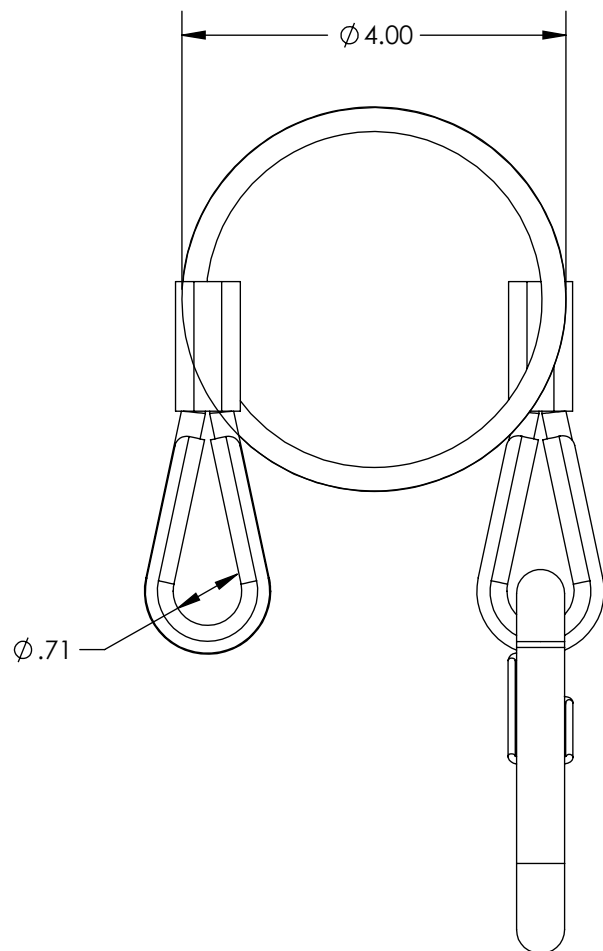




VINYL COAT SWEDGES WITH LENGTH STAMPING



HOOK BREAK STRENGTH
MUST MATCH CABLE STRENGTH

NOTES:

- 1.) ALL DIMENSIONS ARE IN INCH UOS
- 2.) .25 DIA. CABLE
- 3.) STRETCH LENGTH OF CABLE IS 48" WITHOUT HOOK
- 4.) ADD THIMBLES ON LOOP ENDS
- 5.) ADD HOOK WITH CLIP TO ONE END, HOOK MUST MOVE FREELY ON CABLE
- 6.) CABLE IN CLEAR COATING/JACKET
- 7.) STRIP COATING FOR ENTIRE LOOP & SLEEVES, 9" EACH END
- 8.) MIN. BREAKING STRENGTH OF ASSEMBLY 7200 LBS
- 9.) PACKAGING: TIE LOOPS TOGETHER WITH TWIST TIES

<div>DEMCO</div> <div>4010 320TH STREET BOYDEN, IOWA 51234</div>		<div>THE DRAWING AND ALL INFORMATION THERE ON ARE THE PROPERTY OF DEMCO</div>		<div>DESCRIPTION</div> <div>7K 48" SAFETY CABLE CLEAR</div>			
<div>THIRD ANGLE PROJECTION</div> <div></div>	<div>UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES</div>	<div>DRAWN BY</div> <div>BM</div>	<div>DATE</div> <div>09/15/22</div>	<div>DRAWING. NO.</div> <div>17640</div>	<div>REV</div> <div> </div>		
		<div>APPROV. BY</div> <div>JCN</div>	<div>DATE</div> <div>11/15/22</div>				
<div>TOLERANCES</div> <div>.X = ±.060</div> <div>.XX = ±.030</div> <div>.XXX = ±.010</div>		<div>WEIGHT</div>	<div>VOLUME</div>	<div></div>			
<div>MIN. MACHINE SURFACE 250</div> <div>BREAK ALL SHARP EDGES</div> <div>BEND AND DRAFT ≤ ±1°</div>		<div>SCALE</div> <div>1:2</div>	<div>SHEET</div> <div>1 OF 1</div>				